

四大产品体系 全面满足建筑涂装需求

拥有涂料、外墙外保温系统、地坪漆、保温装饰板等四大产品体系

富思特
涂料保温一体化





富思特
涂料保温一体化

- 连续五年荣获中国500强房地产开发企业首选品牌
- 中国最受用户欢迎的十强建筑涂料品牌
- 中国大型工程建设首选品牌
- 中国建筑涂料行业标准制定者
- 中国涂料工业协会理事单位
- 中国建筑装饰协会理事单位
- 中国建筑装饰装修材料协会常务理事单位
- 中国建筑节能协会理事单位
- 建筑装饰一体化指定产品
- 北京市著名商标

富思特生产与技术服务覆盖全国

First Paint's nationwide coverage of production and technical service



作为建筑涂料专家，富思特基于“为客户创造价值、为员工创造前程、为企业创造效益、为社会创造繁荣”的宗旨引领着建筑涂料与节能产业向前飞速发展，为全国各地客户建立了完善的技术服务和物流体系。

As the expert in building coatings, First Paint, based on the mission of Create Values for Customers, Create Career for Employees, Create Benefits for Enterprise and Create Prosperity for Society, has been leading the industry on building coatings and energy saving material development and established a developed technical service and logistic system for nationwide customers.



负离子 O₃⁻ 纳米抗菌技术

特选独有的天然电极材料，能持续释放的负离子分解室内空气中的有害物质，快速消除空气中的有机异味，具有净化空气、消除异味、疲劳消除、促进人体健康的作用。此外，该产品添加了无机复合纳米抗菌剂，具有抑菌、除菌作用，从而降低环境微生物对人体的危害，达到清洁环境的目的。

Specifically selected and unique natural electrode material; anion that can be emitted continuously decomposes hazardous substances contained in indoor air; it can quickly remove organic foreign odor in the air, playing such roles as air purification, fatigue elimination and human health promotion. In addition, inorganic nano anti-bacterial agent is added into the product, offering bacterial inhibition and elimination, thereby reducing the hazard of ambient microorganisms against the human body and consequently cleansing the environment.

主要特点:

- 主动环保
- 释放负离子
- 纳米抗菌技术
- 净化空气
- 超强耐擦洗

技术参数:

干燥时间: 2小时(温度23℃, 相对湿度50%)。
重涂时间: 2至4小时后(温度23℃以上, 相对湿度50%以下)。
理论耗量: 4-5 m²/kg (两遍)。
储存条件: 储存期为一年, 存放于5-35℃干燥处, 避免阳光直射。
涂刷条件: 环境温度高于5℃。

富思特多功能全效内墙漆采用纯进口弹性乳液及世界先进技术精制而成, 其优异的弹性抗裂功能和致密的架桥质膜, 更全方位的对居室墙面室内装饰效果。


First Paint's multi-function full-effectiveness interior wall paint is made from completely imported elastic latex with world advanced technology, allowing it to create luxurious interior decoration effect in a more all-around manner with its elastic anti-crack property and silk-like gentle texture.

主要特点:

- 丝质柔滑手感
- 超弹无裂纹
- 绿色环保
- 优良透气
- 超强耐擦洗

技术参数:

干燥时间: 2小时(温度23℃, 相对湿度50%)。
重涂时间: 2至4小时后(温度23℃以上, 相对湿度50%以下)。
理论耗量: 3.5-4.5 m²/kg (两遍)。
储存条件: 储存期为一年, 存放于5-35℃干燥处, 避免阳光直射。
涂刷条件: 环境温度高于5℃。

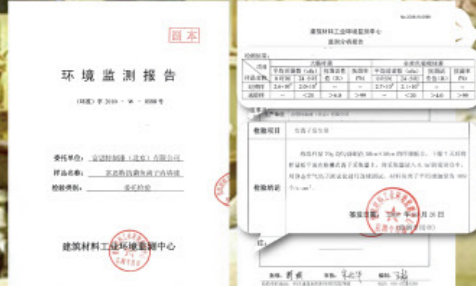



富思特零级防霉内墙漆是公司为地下室、食品厂、酒店及长期潮湿的室内墙面开发的专业级防霉涂料，特别添加世界知名多种防霉材料复制而成，能有效的抑制和防止霉菌、藻类的滋生，确保漆膜的美观和保护性能不受霉变的影响。该产品的耐水、耐碱、耐擦洗等多种性能均达到国家优等品指标，确保您的墙面持久洁净如新。

First Paint's Level 0 mildewproof interior wall paint is a specialized mildewproof coating that we develop for the development of basement, food factory, hotel and long-term moisture indoor environment. With addition of a couple of world famous mildewproof materials, it can effectively inhibit and prevent the growth of mould and algae and keep the aesthetics and protection performance of the paint film from being affected by mould. The fact that its waterproof, alkali resistance and resistance to scrubbing have met the indicators of national top-grade product allows your wall to keep clean.

主要特点:

Main characteristics:




专业级防霉
Specialized mildewproof
绿色环保
Green and environmental protection
优良透气性
Excellent permeability
出色的防潮功能
Outstanding moisture resistance

技术参数:

Technical parameters:

干燥时间: 2小时(温度23℃, 相对湿度50%)
重涂时间: 2至4小时后(温度23℃以上, 相对湿度50%以下)
理论耗量: 3.5-4.5 m²/kg (两遍)
储存条件: 储存期为一年, 存放于5-35℃干燥处, 避免阳光直射。
涂刷条件: 环境温度高于5℃。

Drying time: 2 hours (at temperature of 23°C and relative humidity of 50%).
Recoating time: 2-4 hours later (at temperature of 23°C and above and relative humidity of 50% and below).
Theoretical consumption: 3.5-4.5 m²/kg (twice).
Storage condition: Storage period of one year. Store in dry place at 5-35°C. Avoid direct exposure to sunshine.
Application condition: At ambient temperature of 5°C and above.

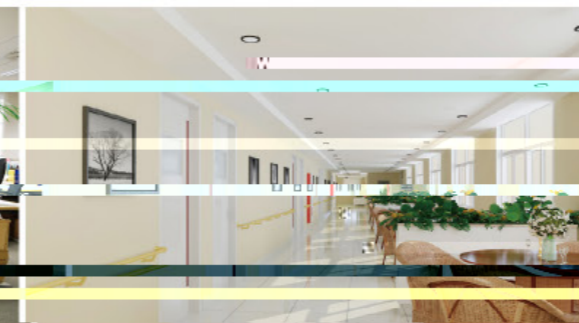

富思特生态环保产品采用全新升级配方，加入耐候级白色颜料，有效克服一般的白色涂料易变色、易变黄的缺陷，即便是多种光源普照的墙面，也能持久保持漆膜亮丽如新。超低的VOC和零甲醛含量有效地降低居室内的异味，确保家居的空气清新，适用于各种大型的墙面装修。

First Paint's ecological and environmental protection product adopts a brand new upgrade formula and added the weather-resistant white pigment to effectively overcome the defect of general white coating that is subject to color change and yellow stain. Even a wall that is exposed to multiple light sources can keep clean and new constantly. By means of ultralow VOC and zero formaldehyde content, it can effectively reduce the foreign odor in the room, ensure the fresh air of the home, and be applicable to various large-scale wall decoration projects.

主要特点:

Main characteristics:



耐光照
Resistance to sunshine
绿色环保
Green and environmental protection
持久亮丽
Sustained fresh
超强耐擦洗
Ultra-strong resistance to scrubbing

技术参数:

Technical parameters:

干燥时间: 2小时(温度23℃, 相对湿度50%)
重涂时间: 2至4小时后(温度23℃以上, 相对湿度50%以下)
理论耗量: 3-4 m²/kg。
储存条件: 储存期为一年, 存放于5-35℃干燥处, 避免阳光直射。
涂刷条件: 环境温度高于5℃。

Drying time: 2 hours (at temperature of 23°C and relative humidity of 50%).
Recoating time: 2-4 hours later (at temperature of 23°C and above and relative humidity of 50% and below).
Theoretical consumption: 3-4 m²/kg (twice).
Storage condition: Storage period of one year. Store in dry place at 5-35°C. Avoid direct exposure to sunshine.
Application condition: At ambient temperature of 5°C and above.

持久防霉



抗光照
耐黄变

富思特®全能抗碱底漆 C 22

FIRST UNIVERSAL ALKALI-RESISTANT PRIMER


富思特全能抗碱底漆以水性丙烯酸共聚物为主要成膜物质的墙面底漆(白色),具有良好的渗透力和优良的抗碱性,能抵抗碱类物质对墙体的化学侵蚀作用,保证面漆持久美观。

As a wall primer (white) with water-based acrylic copolymer being main membrane forming substance, First Paint's universal alkali-resistant primer offers excellent permeability and excellent alkali resistance, who can effectively protect the primer from erosion by chemical substances inside the wall body to keep the primer clean and fresh constantly.

● 抗碱性卓越

- 优良的渗透性和抗碱性。
- 施工简便。
- 水性环保、无毒、无害、无污染。
- 固化基层,提高基层与面层之间的粘接力。

- Superior alkali resistance
- Excellent permeability and alkali resistance
- Convenient for construction
- Water-based material environment-friendly, toxicity free, hazard free and pollution free
- Solidifying substrate to increase the cohesion between substrate and surface layer

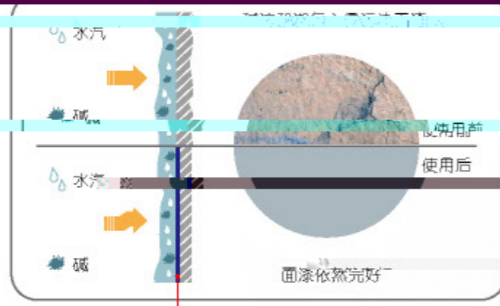

富思特全能抗碱封闭底漆



富思特®高级柔性耐水腻子 C 10

FIRST ADVANCED FLEXIBLE WATER-RESISTANT PUTTY

富思特高级柔性耐水腻子具有优异的柔韧性,可随基材的膨胀收缩而自由伸缩,提升了防开裂性能,即使长期处在潮湿的环境下,也能持续防潮,防止漆膜出现松软、脱落现象。

First Paint's advanced flexible water-resistant putty offers excellent flexibility, enabling it to freely stretch along with subtle change of substrate and crack due to temperature difference, thereby improving cracking prevention property. Therefore, even in a humid environment, it can also show constant moisture resistance to prevent the paint film from softening and shedding.

● 防潮防水

- 耐久性好,二次装修不用铲除
- 节省涂料用量
- 粘结强度高
- 水性环保、无毒无害、无污染

● Moisture and water resistance

- Good durability without need to be removed in case of secondary decoration
- Coating consumption saving
- High bond strength
- Water-based material environment friendly, and toxicity, hazard and pollution free



富思特®艺术灵感 G100

FIRST ARTS INSPIRATION PRODUCT

精选世界最为流行的天然石粒,将您的室内墙面带入立体艺术的境界,不仅为您带来艺术家的气质,更为您创造了宁静的居室环境。可运用特殊的手法和技巧在墙上塑造出不同的造型效果,创造与众不同的装饰效果。

World's most popular natural gravel selected will bring your indoor into a scenario of art, thereby giving you the nature of artist and creating a tranquil home environment. Special means and techniques can be used to create different decorative effects on the wall, creating a unique decoration effect.

主要特点:

Main characteristics:



个性艺术
Personality and art



吸音
Sound absorption



绿色环保
Green and environmental protection



防潮防水
Moisture and water resistance

技术参数:

Technical parameters:

干燥时间: 2小时(温度23℃,相对湿度50%)。

重涂时间: 2至4小时后(温度23℃以上,相对湿度50%以下)。

理论耗量: 1.5-3.5 kg/m²。(注:效果不同,料耗不同)

储存条件: 储存期为一年,存放于5-35℃干燥处,避免阳光直射。

涂刷条件: 环境温度高于5℃。

Drying time: 2 hours (at temperature of 23°C and relative humidity of 50%).
 Recoating time: 2-4 hours later (at temperature of 23°C and above and relative humidity of 50% and below).
 Theoretical consumption: 1.5-3.5 m²/kg (Note: Material consumption depends upon effect).
 Storage condition: Storage period of one year. Store in dry place at 5-35°C. Avoid direct exposure to sunshine.
 Application condition: At ambient temperature of 5 °C and above.

